



## Rukohvati / Shanks

RAM rukohvati vrlo su pouzdani, vrsti, njihovi sastavni dijelovi pažljivo se biraju, te ih je lako podešavati zahvaljujući velikim tolerancijama u ventilima. Dozvoljavaju zavarivanje do 50 mm i rezanje do čak 300 mm. Rukohvati su prikladni za sve navedene priključke za zavarivanje, rezanje i grijanje.

RAM shanks are reliable, strong, its components are chosen with care, and it is easy to regulate (thanks to the very narrow tolerances of knob threadings). It allows to weld up to 50 mm thick parts and to cut up to 300 mm thick parts. Shanks are suitable for all of the mentioned connection for welding, cutting and heating.



RAM 93-02

šifra: 35



RAM 93-02-A

šifra: 910

## Reza RAM 93-01 / Cutting torch RAM 93-01

Reza za plinsko rezanje kisik - acetilen i kisik - propan - butan. Reza služi za rezanje čeličnih limova i profila debljine od 3 - 300 mm. Konstruiran je za rad u iznimno teškim uvjetima koji iziskuju cjelodnevno rezanje poput rada u brodogradnji, teškoj metalnoj industriji...

The cutting torch serves to cut steel between 3 - 300 mm of thickness. The valve in the cutting oxygen supply is controlled with a handwheel. Fuel gas: acetylene, propane - butane. It is constructed for working in extremely difficult conditions that require whole-day cutting like working in shipbuilding, heavy metal industry...


Acetilen  
Ž-RAM-10



PB  
Ž-RAM-20



Žljebljenje / Grooving  
Ž-RAM-3

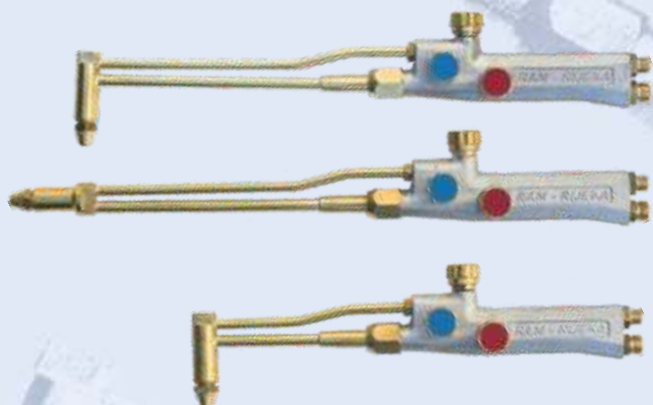

Reza RAM 93-01  
310mm / 90°

šifra: 29

Reza RAM 93-01 ravni  
350mm / 180°

šifra: 31

Reza RAM 93-01 kratki  
210mm / 90°

šifra: 30

## Reza RAM 93-01-A / Cutting torch RAM 93-01-A

Reza za plinsko rezanje kisik - acetilen i kisik - propan - butan. Reza s polugom služi za rezanje čeličnih limova i profila debljine od 3 - 300 mm. Posebno pogodan kod rezanja profila, žljebljenja, te rezanja otpadnog čelika.

The cutting torch serves to cut steel between 3 - 300 mm of thickness. The valve in the cutting oxygen supply is controlled with a lever. Fuel gas: acetylene, propane - butane. Application in cutting profiles, grooving and cutting the waste steel.

Acetilen  
Ž-RAM-10



PB  
Ž-RAM-20



Žljebljenje / Grooving  
Ž-RAM-3



Reza RAM 93-01-A  
800mm / 115°

šifra: 954

Reza RAM 93-01-A  
330mm / 90°


šifra: 715



## Reza RAM 93-03 / Cutting torch RAM 93-03

Kombinirani reza za plinsko rezanje kisik - acetilen i kisik - propan - butan. Reza služi za rezanje elin limova i profila debljine od 3 - 300 mm.

The cutting attachment serves to cut steel between 3 - 300 mm of thickness. The valve in the cutting oxygen supply is controlled with a handwheel. Fuel gas: acetylene, propane - butane.

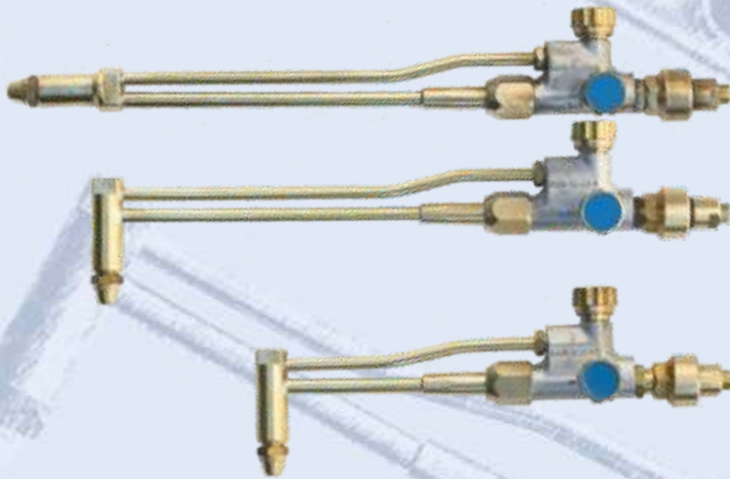

Reza RAM 93-03 ravni  
340mm / 180°

šifra: 34

Reza RAM 93-03  
300mm / 90°

šifra: 32

Reza RAM 93-03 kratki  
200mm / 90°

šifra: 33

Acetilen  
Ž-RAM-10



PB  
Ž-RAM-20



Žljebljenje / Grooving  
Ž-RAM-3



## Reza RAM 93-03-A / Cutting torch RAM 93-03-A

Kombinirani reza za plinsko rezanje služi za rezanje elin limova od 3 - 100 mm debljine.

The cutting attachment serves to cut steel between 3 - 100 mm of thickness.



Reza RAM 93-03-A  
190mm / 90°

šifra: 984

Acetilen  
Ž-RAM-10




PB  
Ž-RAM-20



Žljebljenje / Grooving  
Ž-RAM-3



## Rezervni dijelovi za reza RAM 93-03 i rukohvat RAM 93-02

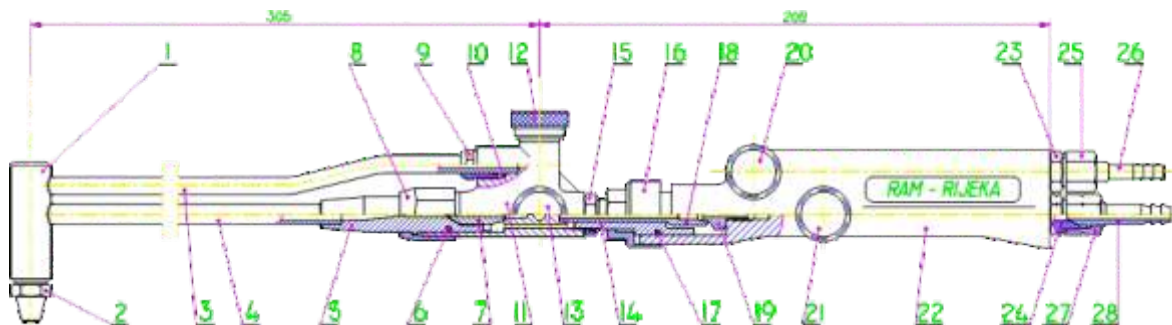

- |          |                    |                          |                               |                          |                          |
|----------|--------------------|--------------------------|-------------------------------|--------------------------|--------------------------|
| 1. Glava | 6. Gumeni prsten   | 11. Ru ka                | 16. Matica ru ke              | 21. Ventil plina         | 26. Spoj za gumu (kisik) |
| 2. Žižak | 7. Injektor        | 12. Ventil kisika        | 17. Gumeni prsten             | 22. Ru ka                | 27. Matica               |
| 3. Cijev | 8. Matica          | 13. Ventil plina         | 18. Nepropusna cijev          | 23. Spoj M 16x1.5        | 28. Spoj za gumu         |
| 4. Cijev | 9. Matica 1/4"     | 14. Spoj                 | 19. Oslonac                   | 24. Spoj R 3/8" - lijevi |                          |
| 5. Mješa | 10. Brtveni prsten | 15. Kontra matica M 14x1 | 20. Ventil kisika za grijanje | 25. Matica spoja za gumu |                          |